


TOP

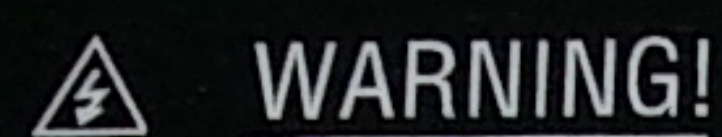

**WARNING!**

CONTACT WITH TERMINALS  
MAY CAUSE ELECTRICAL SHOCK

MODEL NO. M-3410A-P3.  
SERIAL NO. 3181  
SOFTWARE NO. V.01.03.02.  
SERIAL NO. 3181

F2  
3.15A, 250V

F1  
3.15A, 250V

**POWER SUPPLY**

☐ 9-36 --- + (28)  
☐ 36-75 --- - (27)  
☒ 85-150 ~ 50/60 HZ 5 VA

**CAUTION**  
DRY CONTACT  
INPUTS ONLY

IN RETURN (26)

IN 1 (25)

IN 2 (24)

COM (23)

5A (22)

1A (21)

COM (20)

5A (19)

1A (18)

COM (17)

5A (16)

1A (15)



RS232  
COM 2

RX+  
RX-  
TX+  
TX-  
GND  
RS-485

OUT1

OUT2

OUT3  
SELF-TEST

NOT USED

V<sub>A</sub> OR V<sub>AB</sub>

V<sub>B</sub> OR V<sub>BC</sub>

V<sub>C</sub>, V<sub>G</sub> OR V<sub>SYNC</sub>

69-480VAC  
50/60 HZ  
NOMINAL

M-3410A-P3 REV:B-1  
S/N 3181



NRTL /C  
LR 89464



LISTED  
IND. CONT. EQ.  
83F4

**BECKWITH ELECTRIC CO. INC.**  
6190 118th AVE NO.  
LARGO, FL 33773 727-544-2326  
PATENT NO. 5,592,393



BS9

BS11

BS13

BS15

BS17

BS19

10A

2

13

2

12

13